


Range: **DYNAMIC**

Type name: **CB95.0**

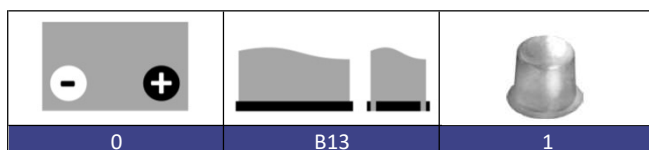

| PERFORMANCES* | | CONFIGURATION | |
|---|-------------|---------------|----------------------|
| Voltage: | 12 V | Size: | 353x175x175 mm (LB5) |
| Capacity: | 95 Ah (20h) | Polarity: | 0 |
| C. Cranking (EN): | 760 A | Terminal: | 1 (taper) |
| Vibration (EN): | V1 | Holddown: | B13 |
| Duration (EN): | E1 | Ventilation: | Central |
| Self-Discharge: | 12 months | Maintenance: | Not required (MF) |
| <small>(from the date of production, at 25°C)</small> | | | |

*According to standard EN 50342

| INTERNAL CONSTRUCTION | | COMPONENTS | |
|-----------------------|--------------------|-----------------|---------------------------|
| Tecnology: | Expanded | Box/Recipiente: | PP/black |
| Alloy: | Calcium | Lid: | Double, PP/black |
| Separator: | PE envelope | Plugs: | Thermal sealing, PP/black |
| Total Weight: | 20,3 kg | Handles: | On lid, PP/black |
| Acid: | Inside the battery | | |
| Origin: | Europe | | |

| RECOMMENDATIONS | |
|-----------------|--|
| Storage: | Check voltage every 6 months. Avoid exposure to sub-zero temperatures. |
| Recharge: | Use automatic chargers with constant voltage. |
| Installation: | Not applicable to Start-Stop vehicles. |